




## GETTING TO YOUR NRC

### WALL-MOUNTED APPLICATIONS

Larger, louder spaces with high ambient noise levels will require a higher noise reduction coefficient (NRC) in order to reduce unwanted sound. Smaller areas with less noise will require a lower NRC.

Wall-mounted panels are available in five profile thicknesses which provides a range of NRC values for designers and specifiers.

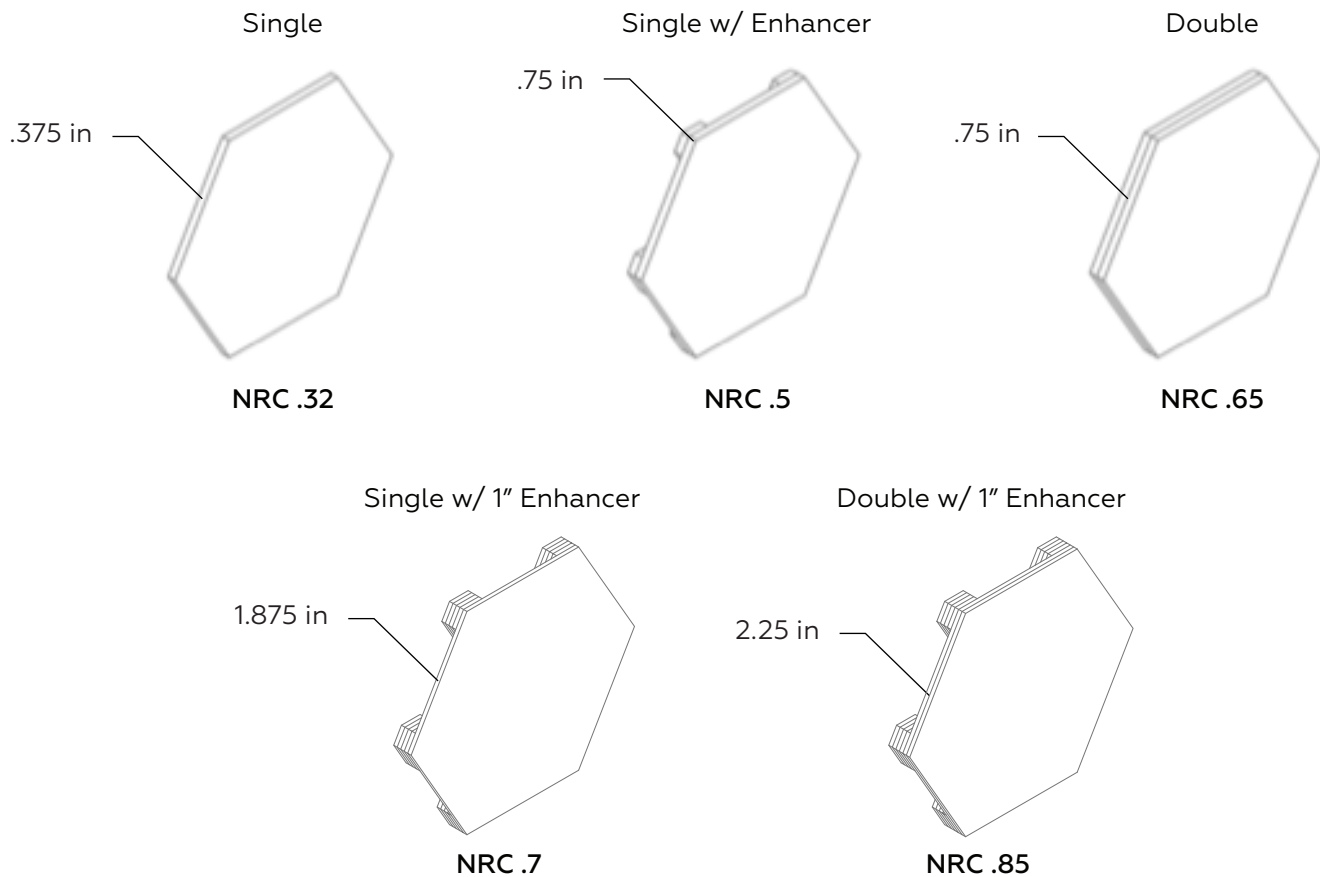

No matter your NRC requirement, the MPS design team is available to help custom engineer a beautiful and functional solution for the unique needs of any project.